

Wayne Township Code Section 180 requires that a **Street Permit** be obtained before performing any work within the public right-of-way. Items requiring a Street Permit include (but are not limited to) concrete sidewalk and apron installation/replacement; water and sewer lateral installation/replacement; driveway drop curb replacement; sump pump connection to drainage structure or roof drain connection to curb or drainage structure. The application permit fee is \$250. A refundable deposit is also required. The deposit will be returned following inspection and approval of the R.O.W. restoration by the Township.

Street Permit applications shall be accompanied by a Certificate of Insurance indicating the applicant and the Township of Wayne, as third party, are insured against claims for damages for personal injury as well as claims for property damage which may arise out or from the performance of the work. Insurance coverage shall not be less than the following:

\$100,000 for each person, bodily injury.
\$300,000 for each accident, bodily injury.
\$100,000 property damage.

Street Permit applications are available on the Township website or at the Engineering Division office. The permit application must be filed at the Engineering Division office.

Please call the Engineering Division office at (973) 694-1800 Extension 3336 for additional information regarding a Street Permit.

APPLICATION FOR TOWNSHIP STREET PERMIT
TOWNSHIP OF WAYNE
ENGINEERING DIVISION

TYPE OF WORK PROPOSED (check all that apply):

- | | |
|--|---|
| <input type="checkbox"/> ROAD OPENING FOR WATER SERVICE | <input type="checkbox"/> CURB/DROP CURB REPLACEMENT |
| <input type="checkbox"/> ROAD OPENING FOR SEWER LATERAL | <input type="checkbox"/> SIDEWALK/APRON REPLACEMENT |
| <input type="checkbox"/> ROAD OPENING FOR GAS LATERAL | <input type="checkbox"/> ROAD OPENING FOR CURB BOX |
| <input type="checkbox"/> ROAD OPENING FOR SUMP/ROOF DRAINS | <input type="checkbox"/> ROAD OPENING FOR SAN. CLEANOUT |
| <input type="checkbox"/> ROAD OPENING FOR (OTHER): _____ | |
| <input type="checkbox"/> OTHER: FOR _____ | |

WORK LOCATION:

HOMEOWNER: _____ PHONE NO. _____

ADDRESS: _____ BLOCK _____ LOT _____

Email: _____

CONTRACTOR INFORMATION:

NAME: _____ PHONE NO. _____

ADDRESS: _____
NO. STREET CITY STATE ZIP

PLANS:

A PLAN OR SKETCH OF THE PROPOSED WORK SHALL BE SUBMITTED TO AVOID MISUNDERSTANDING. USE THE REVERSE SIDE OF THIS APPLICATION, OR SUBMIT A SEPARATE PLAN, SHOWING BASIC INFORMATION (AREA OF OPENING OR SIDEWALK/DRIVEWAY REPLACEMENT) AND DIMENSIONS.

WATER MAIN OR SANITARY SEWER MAIN EXTENSIONS REQUIRE PLANS PREPARED BY A LICENSED PROFESSIONAL ENGINEER TO BE SUBMITTED FOR REVIEW AND APPROVAL BY THE TOWNSHIP ENGINEER PRIOR TO ISSUANCE OF ANY STREET PERMIT. ALSO, WATER/SEWER CONNECTION PERMIT IS REQUIRED PRIOR TO THE ISSUANCE OF A STREET PERMIT.

FEES REQUIRED:

- \$250.00 APPLICATION FEE PER PROPERTY

DEPOSITS REQUIRED:

(DEPOSITS ARE REFUNDABLE UPON SATISFACTORY COMPLETION OF WORK AND PASSING INSPECTIONS.)

- ROAD OPENING - \$75.00 PER SQUARE YARD OF TRENCH AREA (\$2500.00 MINIMUM)
- CURB/DROP CURB-\$250 PER 10 FOOT SECTION OR FRACTION THEREOF (\$2500 MINIMUM)
- SIDEWALK/APRON - \$75 PER SQUARE YARD OF AREA (\$2500.00 MINIMUM)

NAME & SIGNATURE OF APPLICANT DATE _____


IT'S THE LAW – CALL FOR MARKOUTS BEFORE YOU DIG 1-800-272-1000

Per Chapter 200-53, please contact Police Department at 973-694-3520 one week prior to commencement of any work to determine the required traffic control and the need for a Preconstruction meeting.

ROADWAY RESURFACED WITHIN PAST 5 YEARS YES NO

APPROVED BY/DATE

SKETCH OF PROPOSED WORK: (use as base and draw in information)

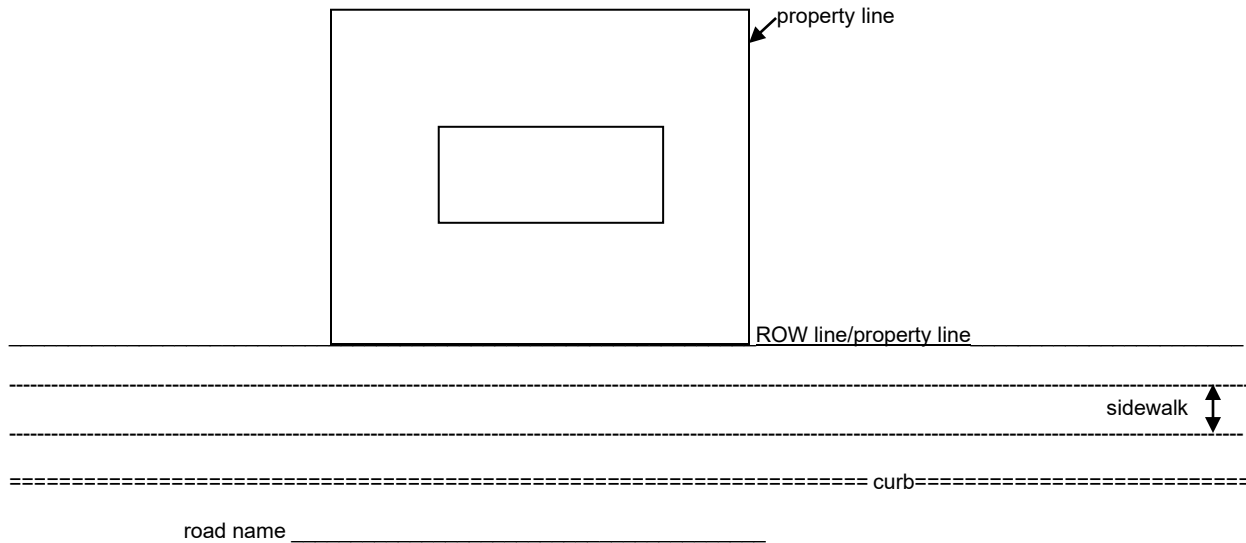

IMPORTANT INSTRUCTIONS TO OWNERS AND CONTRACTORS:

1. **Seventy two (72) hours prior notice must be given for inspection scheduling. Please call 973-694-1800, extension 3263.**
2. Note: The Engineering Division will not accept improper construction or inferior workmanship. **All work must conform to Wayne Township Engineering Division Details.** These details are available on the Township website and at the Engineering Division office. These standards exist for uniformity of structural integrity and aesthetics throughout the Township. They may not be deviated from without the express written approval of the Township Engineer. Failure to comply with the standards may result in forfeiting of deposits, and tax liens placed on the property for any corrective work performed by the Township.

ROAD OPENING/TRENCH REPAIR

1. Provide barricades for traffic protection and pedestrian protection.
2. Contact Police Department Traffic Bureau for traffic control requirements.
3. Excavated material shall be removed from site. Backfill material shall be ¾" dense graded aggregate (Q.P.). Asphalt replacement shall be 2" HMA surface course (9.5 M64) and 5" HMA base course (25 M64).
4. Trench pavement repair shall be rejuvenated on streets resurfaced within 5 years to produce seamless patch.

CURBS AND DROP CURBS

1. Remove old curb in complete sections, top to bottom, joint to joint.
NO CUTTING OR CHIPPING DOWN OF EXISTING CURB IS PERMITTED.
2. Contact Police Department Traffic Bureau for traffic control requirements.

SIDEWALK AND APRON

1. Provide alternate, temporary access for pedestrian traffic.
2. Remove old sidewalk/apron slabs in complete sections, top to bottom, joint to joint.

INSPECTION

Inspected By _____
Date

Comments

